

3008012 Series 8 Passages Pneumatic & Hydraulic Rotary Unions

8 Passage(G3/8" port, 10~12mm pipes)+Electrical(Power/Signal)

support G3/8" port for 10~12mm pipes, can transfer various mediums including compressed air, steam, vacuum, negative pressure, positive pressure, cooling water, hot oil, etc when 360° rotating, it also can combine to transmit electrical power and signal.



Part No. Description


8 Passage Rotary Unions
G3/8" port, 12mm pipes

For example:
0610:6 circuits@10A 1230:12 circuits@30A

3008012 - Power Circuits - Signal Circuits

For example:
06S:6 circuits signal@2A
12S:12 circuits signal@2A


3008012 (Rotary Union Only) Drawing, 8 Passage(10~12mm pipe)

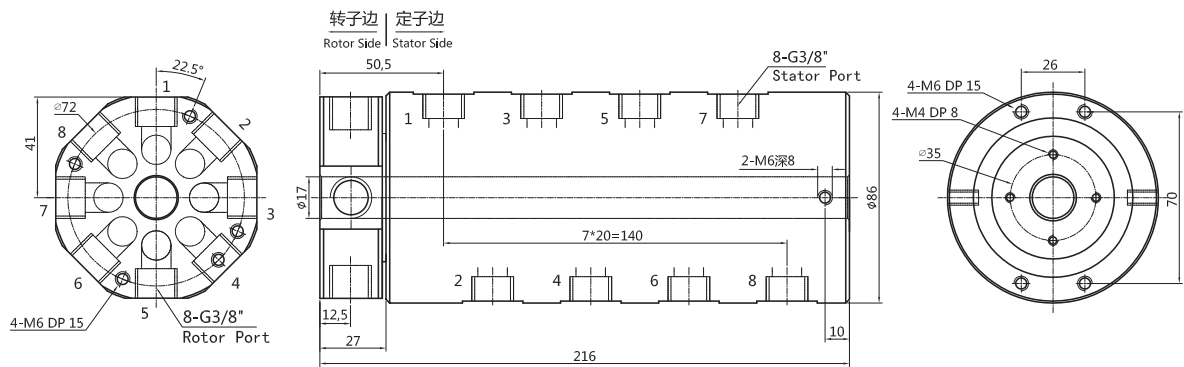

Standard Model List

Model	Passages(Gas/Flow)	Port Size	Pipe Size
3008012	8	G3/8"	10~12mm


3008012-X4S 8 Passage(10~12mm pipe)
+6~56 circuits electrical signal@2A (Suitable for Solenoid valve or Sensor switch Signals)

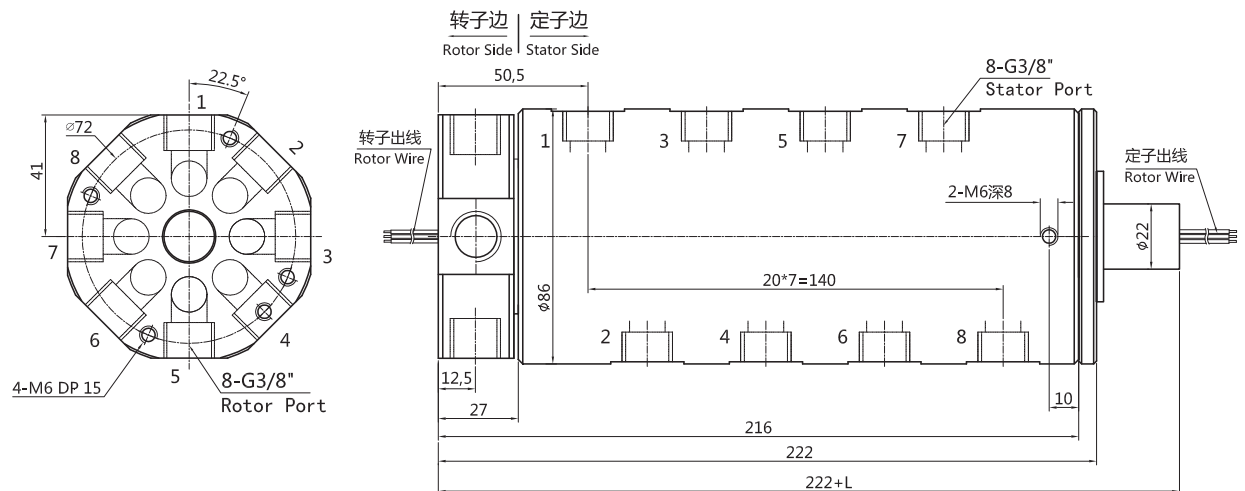

Standard Model List

Model	Passages(Gas/Flow)	Port Size	Pipe Size	Signal Circuits(2A)	Length L(mm)
3008012-06	8	G3/8 "	10~12mm	6	14
3008012-12	8	G3/8 "	10~12mm	12	21
3008012-24S	8	G3/8 "	10~12mm	24	35
3008012-36S	8	G3/8 "	10~12mm	36	52.3
3008012-56S	8	G3/8 "	10~12mm	56	82

3008012 (Rotary Union Only) Drawing,8 Passage(10~12mm pipe)

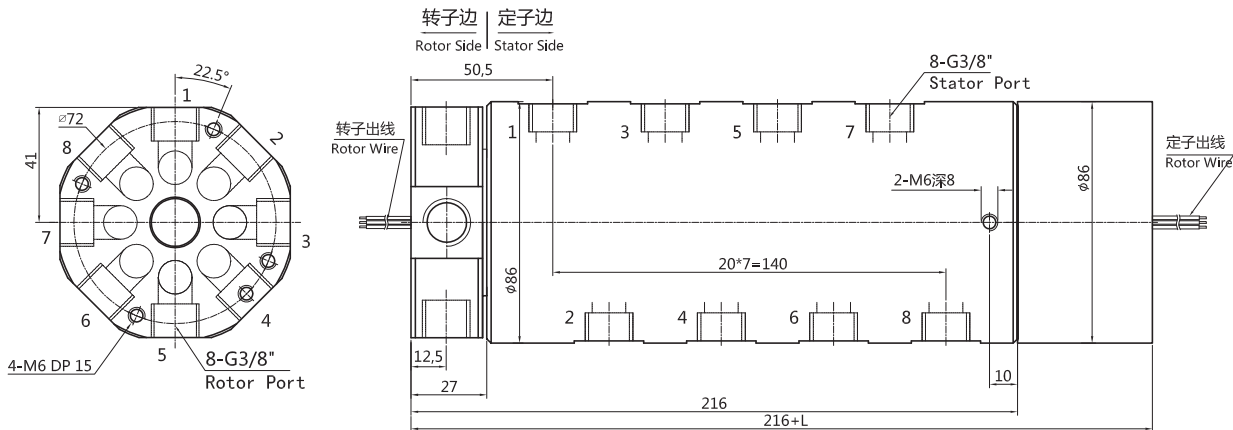

Standard Model List

Model	Passages	Port Size	Pipe Size	Circuits		Length L(mm)
				Power(10A)	Signal(2A)	
3008012-06S	8	G3/8 "	10~12mm	0	6	48
3008012-0610	8	G3/8 "	10~12mm	6	0	48
3008012-12S	8	G3/8 "	10~12mm	0	12	72
3008012-0610-06S	8	G3/8 "	10~12mm	6	6	72
3008012-1210	8	G3/8 "	10~12mm	12	0	72
3008012-0610-12S	8	G3/8 "	10~12mm	6	12	96
3008012-1210-06S	8	G3/8 "	10~12mm	12	6	96
3008012-18S	8	G3/8 "	10~12mm	0	18	96
3008012-1810	8	G3/8 "	10~12mm	18	0	96
3008012-0610-18S	8	G3/8 "	10~12mm	6	18	120
3008012-24S	8	G3/8 "	10~12mm	0	24	120
3008012-2410	8	G3/8 "	10~12mm	24	0	120
3008012-36S	8	G3/8 "	10~12mm	0	36	168
3008012-1210-24S	8	G3/8 "	10~12mm	12	24	168
3008012-3610	8	G3/8 "	10~12mm	36	0	168
3008012-48S	8	G3/8 "	10~12mm	0	48	216
3008012-1210-36S	8	G3/8 "	10~12mm	12	36	216
3008012-4810	8	G3/8 "	10~12mm	48	0	216
3008012-60S	8	G3/8 "	10~12mm	0	60	264
3008012-1210-48S	8	G3/8 "	10~12mm	12	48	264
3008012-72S	8	G3/8 "	10~12mm	0	72	312
3008012-2410-48S	8	G3/8 "	10~12mm	24	48	312
3008012-84S	8	G3/8 "	10~12mm	0	84	360
3008012-2410-60S	8	G3/8 "	10~12mm	20	60	360

Model	Passages	Port Size	Pipe Size	Circuits		Length L(mm)
				Power(10A)	Signal(2A)	
3008012-96S	8	G3/8"	10~12mm	0	96	408
3008012-108S	8	G3/8"	10~12mm	0	108	456
3008012-120S	8	G3/8"	10~12mm	0	120	504

Technical Specification

Rotary Union Specification			
Passages	8 Passage	Max. Pressure	1Mpa, Vacuum -1.5kPa
Pipe size	10~12mm Pipe(G3/8")	torque	<0.8N.m
Mechanical parameters		Electrical parameters	
Spec.	Data	Spec.	Data
Working Life	20millions for ref (depends on working conditions)		Power
Max. Speed	250RPM continuously, 1000RPM intermittently	Voltage Range	0~440VAC/VDC
		Insulation Resistance	<500MΩ/300VDC
Working Temp.	-30°C~80°C	Lead Wire Spec.	AWG17# Silver-plated teflon wire
Work Humidity	0~85% RH	Lead Wire Length	standard 250mm(can be customized)
Contact Material	precious metal	Insulation Resistance	500VAC@50Hz,6s
Housing Material	aluminum alloy	Electrical Noise	<0.01Ω
IP Grade	IP51		

Color Code of Lead Wire

ring #	1	2	3	4	5	6	7	8	9	10	11	12
color	BLK	BRN	RED	ORG	YEL	GRN	BLU	PUR	GRY	WHT	PINK	LGT BLU