

FO200C series 2 channels Fiber Optic slip ring



2 channels Fiber(support single mode/multi-mode). Suitable for some applications which requires to keep 360° unrestricted, continuous or intermittent rotating and transmit mass data/signal from static side to rotation side, which can improve mechanical performance, simplify system operation and avoiding damages to fiber.

Part No. Description


FO200C-	Fiber type	Connector type-	wavelength
FO200C: two channels Fiber optic rotary joint appearance in type C			Wavelength : 01:1310/1550 (Single mode) 02:850/1310 (multi mode)
Fiber type code : 01:9/125um(Single mode) 02:50/125um(multi mode) 03:62.5/125um(multi mode)		Connector type code : FC:FC connector ST:ST connector SC:SC connector LC:LC connector t connector interface is PC by default, if need APC FC/APC pls add APC, as FC/APC	

Examples

FO200C-01-FC-01: FO200C means Single Channel Fiber Optic rotary joint(appearance in type C), the first 01 means Fiber type 9/125um(single mode), FC means FC connector, fiber interface PC, the second 01 means wavelength :1310/1550;

FO200C-03-LC/APC-02: FO200C means single channel Fiber-Electric rotary joint(appearance in type B), 03 means Fiber type 62.5/125m(multi-mode), LC/APC means LC connector, APC interface, 02 means wavelength :850/1310;

*Remark: If you have special requirements for fiber channel no., electric circuit no., Fiber connector type, wavelength or wire exiting, pls contact SenRing salesman.

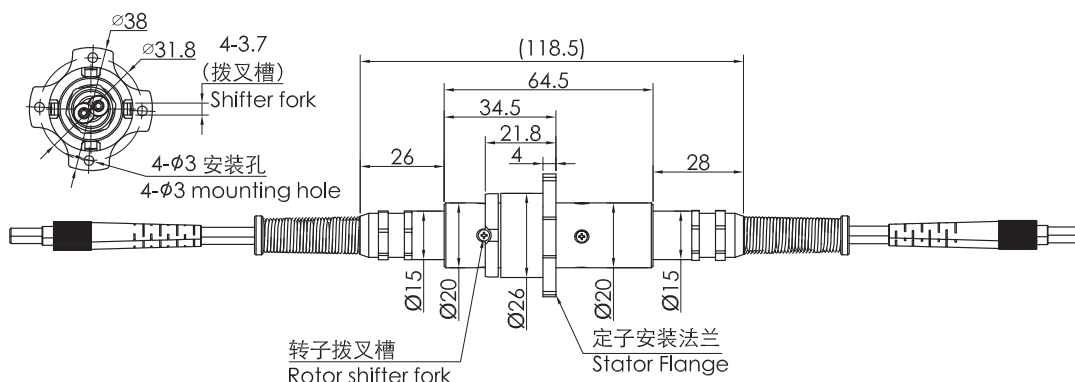

Technical Specification of the slip ring

item	type	Single mode (SM)	multi mode (MM)
Bandwidth(nm)		± 50	
Max insertion Loss, 23°C(dB)		4	3.5
Insertion loss fluctuation(dB)		≤ 2	≤ 1
Return loss(dB)		≥ 55(APC)	≥ 40(PC)
max power(W)		0.5	
Max speed(rpm)		2000	
Working life		> 200 million turn	
Work Temperature(°C)		-20~60	
Storage temperature(°C)		-50~85	