


# H2056 Series



H2056 series standard precise slip ring, integrated structure design, with through hole 20mm , OD56mm , suitable for rotating application which requires a through hole  $\leq 20\text{mm}$  ( remark: if need a hole  $< 20\text{mm}$ , can add a inner bushing)

## Part No. description

H2056	- Power circuits no. -	Signal circuits no. -	Eroduct grade
H:through hole slip ring 1286:ID 20mm, OD 56mm			Example: C: standard level D:Industrial level H:High quality level
Example: 0610:6 circuits,10A per circuit 1220:2circuits,10A per circuit			Example: 06S:6circuits signal (0~2A) 12S:12circuits signal (0~2A)

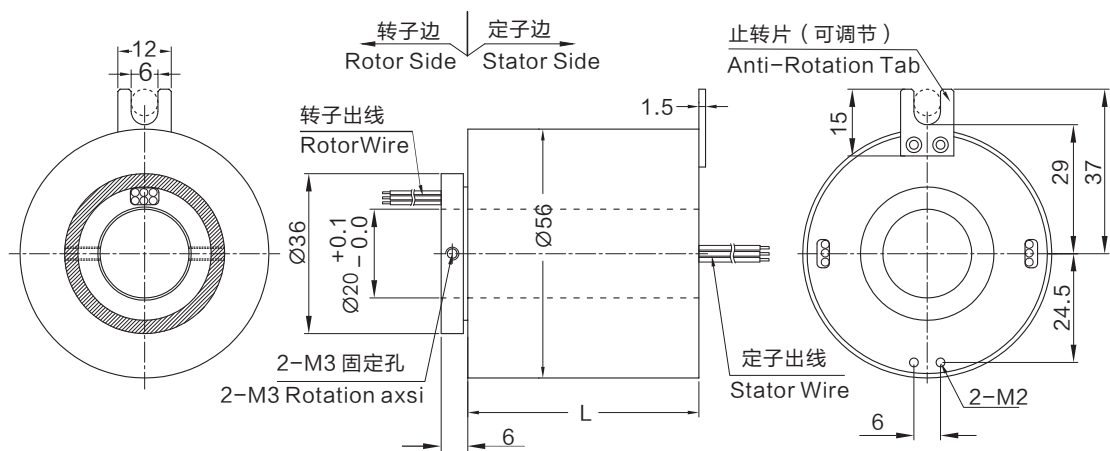

## Standard Model List

H2056 series model list							
Part no.	Circuits		Length L(mm)	Part no.	Circuits		Length L(mm)
	10A	Signal or 0~5A			10A	Signal or 0~5A	
H2056-02S	0	2	34	H2056-1010-08S	10	8	68.5
H2056-0210	2	0	34	H2056-1210-06S	12	6	68.5
H2056-03S	0	3	34	H2056-1410-04S	14	4	68.5
H2056-0310	3	0	34	H2056-1610-02S	16	2	68.5
H2056-06S	0	6	34	H2056-24S	0	24	85.5
H2056-0210-04S	2	4	34	H2056-0410-20S	4	20	85.5
H2056-0410-02S	4	2	34	H2056-0610-18S	6	18	85.5
H2056-0610	6	0	34	H2056-1210-12S	12	12	85.5
H2056-12S	0	12	52	H2056-1810-06S	18	6	71
H2056-0210-10S	2	10	52	H2056-2410	24	0	89
H2056-0310-09S	3	9	52	H2056-30S	0	30	107
H2056-0610-06S	6	6	52	H2056-0210-28S	2	28	101
H2056-0810-04S	8	4	52	H2056-0410-26S	4	26	101
H2056-1010-02S	10	2	52	H2056-0610-24S	6	24	101
H2056-1210	12	0	52	H2056-36S	0	36	125

\*Remark:Circuits can be combined in parallel for bigger current,N circuits of 10A to get  $N*10\text{A}$ , such as 2 circuits of 10A in parallel for 20A use.10A circuits No. and signal circuits ( 5A) No. can be customized based on standard products, pls inquiry Senring for details.

## Technical Specification

Mechanical		Electrical		
Spec	Data	Spec	Data	
Working life	pls refer to product grade table		Power	Signal
Rotating speed	pls refer to product grade table	Rated voltage	0~440VAC/VDC	0~440VAC/VDC
Working temp.	-30°C~80°C	Insulation resistance	≥1000mΩ/500VDC	≥1000mΩ/500VDC
Work humidity	0~85% RH	Lead wire spec	AWG17# Silver-plated teflon	AWG22# Silver-plated teflon
Contact material	pls refer to produce grade table	Lead wire length	standard 300mm(can be customized)	
Housing material	AL alloy	Dielectric Strength	800VAC@50Hz,60s	
Torque	0.05N.m (0.02N.m/6circuits)	Electrical noise	<0.01Ω	
IP grade	IP51			

## Product Grade Table

Grade code	Max rotating speed	Working life	Contact material
C:standard	250RPM	20millisons revolutions	precious metal
D:industrial	600RPM	80millisons revolutions	precious metal
H:high quality	1000RPM	150millisons revolutions	gold alloy

## Color code of Lead Wire

ring#	1	2	3	4	5	6	7	8	9	10	11	12
color	BLK	BRN	RED	ORG	YEL	GRN	BLU	PUR	GRY	WHT	PINK	LGT BLU
ring#	13	14	15	16	17	18	19	20	21	22	23	24
color	WHT/BLK	WHT/BRN	WHT/RED	WHT/ORG	WHT/YEL	WHT/GRN	WHT/BLU	WHT/PUR	WHT/GRY	BLK/RED	BLK/BRN	Transparent

Remark: "1" : the first wire from rotor side , H2056-06S wire color sequence: BLK/BRN/RED/ORG/WHT/GRN , 24 color wires as one group , if more than 24wires, repeat as sequence , use number tube to tell group 1#, 2#....