

H2069 Series



H2069 series standard precise slip ring, integrated structure design, with through hole 20mm , OD69mm , suitable for rotating application which requires a through hole $\leq 20\text{mm}$ (remark: if need a hole $< 20\text{mm}$, can add a inner bushing)


Part No. description

H2069 - Signal circuits no. - Eproduct grade

H:through hole slip ring
2069:ID 20mm, OD 69mm

Example:
06S:6circuits signal (0~2A)
12S:12circuits signal (0~2A)

Example:
C: standard level
D:Industrial level
H:High quality level

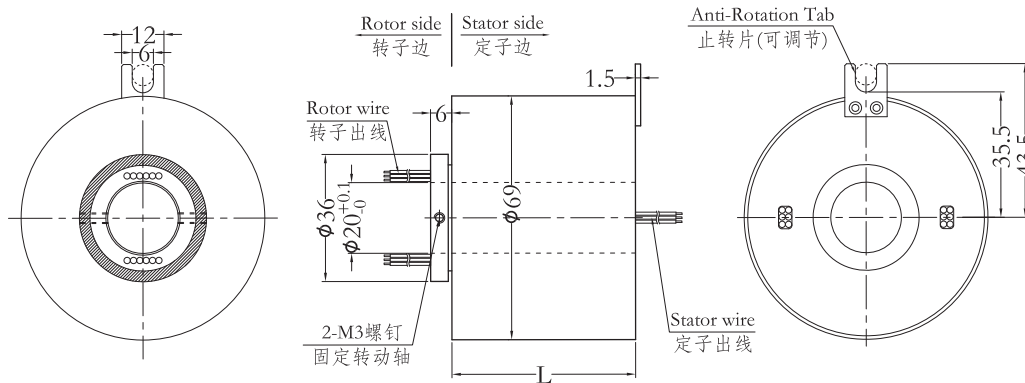

Standard Model List

H2069 series model list							
Part no.	Circuits		Length L(mm)	Part no.	Circuits		Length L(mm)
	10A	Signal or 0~5A			10A	Signal or 0~5A	
H2069-02S	0	2	23	H2069-1010-08S	10	8	68.5
H2069-0210	2	0	23	H2069-1210-06S	12	6	68.5
H2069-03S	0	3	26	H2069-1410-04S	14	4	68.5
H2069-0310	3	0	26	H2069-1610-02S	16	2	68.5
H2069-06S	0	6	34	H2069-24S	0	24	85.5
H2069-0210-04S	2	4	34	H2069-0410-20S	4	20	85.5
H2069-0410-02S	4	2	34	H2069-0610-18S	6	18	85.5
H2069-0610	6	0	34	H2069-1210-12S	12	12	85.5
H2069-12S	0	12	52	H2069-1810-06S	18	6	85.5
H2069-0210-10S	2	10	52	H2069-2410	24	0	85.5
H2069-0310-09S	3	9	52	H2069-30S	0	30	101
H2069-0610-06S	6	6	52	H2069-0210-28S	2	28	101
H2069-0810-04S	8	4	52	H2069-0410-26S	4	26	101
H2069-1010-02S	10	2	52	H2069-0610-24S	6	24	101
H2069-1210	12	0	52	H2069-36S	0	36	119
H2069-18S	0	18	68.5	H2069-0410-32S	4	32	119
H2069-0210-16S	2	16	68.5	H2069-0610-30S	6	30	119
H2069-0410-14S	4	14	68.5	H2069-42S	0	42	137
H2069-0610-12S	6	12	68.5	H2069-0410-38S	4	38	137
H2069-0810-10S	8	10	68.5	H2069-48S	0	48	153

*Remark:Circuits can be combined in parallel for bigger current,N circuits of 10A to get N*10A, such as 2 circuits of 10A in parallel for 20A use.10A circuits No. and signal circuits (5A) No. can be customized based on standard products,pls inquiry Senring for details.

Technical Specification

Spec	Mechanical		Spec	Electrical	
	Data			Data	
Working life	pls refer to product grade table			Power	Signal
Rotating speed	pls refer to product grade table		Rated voltage	0~440VAC/VDC	0~440VAC/VDC
Working temp.	-30°C~80°C		Insulation resistance	≥1000mΩ/500VDC	≥1000mΩ/500VDC
Work humidity	0~85% RH		Lead wire spec	AWG17# Silver-plated teflon	AWG22# Silver-plated teflon
Contact material	pls refer to produce grade table		Lead wire length	standard 300mm(can be customized)	
Housing material	AL alloy		Dielectric Strength	800VAC@50Hz,60s	
Torque	0.05N.m (+0.02N.m/6circuits)		Electrical noise	<0.01Ω	
IP grade	IP51				

Product Grade Table

Grade code	Max rotating speed	Working life	Contact material
C:standard	400RPM	20millisons revolutions	precious metal
D:industrial	800RPM	60millisons revolutions	precious metal
H:high quality	1200RPM	150millisons revolutions	gold alloy

Color code of Lead Wire

ring#	1	2	3	4	5	6	7	8	9	10	11	12
color	BLK	BRN	RED	ORG	YEL	GRN	BLU	PUR	GRY	WHT	PINK	LGT BLU
ring#	13	14	15	16	17	18	19	20	21	22	23	24
color	WHT/BLK	WHT/BRN	WHT/RED	WHT/ORG	WHT/YEL	WHT/GRN	WHT/BLU	WHT/PUR	WHT/GRY	BLK/RED	BLK/BRN	Transparent

Remark:"1" : the first wire from rotor side , H2069-06S wire color sequence: BLK/BRN/RED/ORG/WHT/GRN , 24 color wires as one group , if more than 24wires, repeat as sequence , use number tube to tell group 1#, 2#...