

UH2586-01 series USB2.0 signal slip ring

1 channel USB2.0 wire+1~48 circuits power/signal

SenRing UH2586-01 series Single channel USB slip ring, USB cable with 360° rotating, can be combined to transmit 2~38 circuits power/signal as well as fiber optic、gigabit ethernet. UH2586-01 series 1 channel USB slip ring has the advantages of stable signal transmission, no packet loss, no string code, small return loss, small insertion loss, etc.... Hole size 25.4mm, OD86mm, suitable for any rotating application which requires a through hole ≤ 25.4 mm. UH2586-01 series USB slip ring is a standard model, stock available for common use. Pls contact the SenRing technician if you have special specification requirements for customization.



Part No. Description

UH2586-01 - power circuits - signal circuits - Product grade

U: USB Slip Ring

H means through hole
ID: 25.4mm OD: 86mm
01: 1 set of USB cable

Examples:

0610: 6 circuits@10A
1210: 12 circuits@10A

Examples:

C: standard
D: industrial


Examples:

06S: 6 circuits signal@2A(5A options)
12S: 12 circuits signal@2A(5A options)

Examples

UH2586-01-06S: U means USB signal slip ring, H means through hole slip ring, 2586 means hole size: 25.4mm, OD86MM, 01 means 1 channel USB2.0, 06 means 6 circuits signal;

UH2586-01-0310-04S: U means USB signal slip ring, H means through hole slip ring, 2586 means hole size 25.4mm, OD86MM, 01 means 1 channel USB2.0, 0310 means 3 circuits current(10A each), 04S means 4 circuits signal;

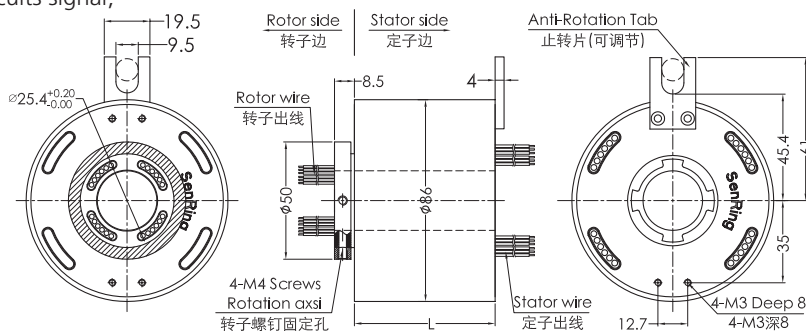

选型表

Model	power/signal circuits no.			USB2.0 channels no.	Length l(mm)
	0~2A	power(10A)	power(20A)		
UH2586-01-02S	2	0	0	1	48
UH2586-01-0210	0	2	0	1	48
UH2586-01-0420	0	0	4	1	72
UH2586-01-08S	8	0	0	1	72
UH2586-01-0810	0	8	0	1	72
UH2586-01-0210-06S	6	2	0	1	72
UH2586-01-0410-04S	4	4	0	1	72
UH2586-01-14S	14	0	0	1	96
UH2586-01-1410	0	14	0	1	96
UH2586-01-0410-10S	10	4	0	1	96
UH2586-01-0810-06S	6	8	0	1	96
UH2586-01-20S	20	0	0	1	120
UH2586-01-2010	0	20	0	1	120
UH2586-01-26S	26	0	0	1	144
UH2586-01-38S	38	0	0	1	192

*Remark: Circuits can be combined in parallel for bigger current, N circuits of 10A to get N*10A, such as 2 circuits of 10A in parallel for 20A use. Pls contact the SenRing salesman if you want to customize USB and power/signal circuit no, or mix other signal.

All rights reserved © Senring Electronics Tel: +86-755-29717812 E-mail: sales@senring.com website: www.senring.com

Technical Specification of the slip ring

USB cable	1 channels USB2.0	connector	USB 2.0 male (female optional)	
Mechanical Data		Electrical Data		
spec	data	spec	data	
working life	refer to slip ring grade table		power	signal
Rotating speed	refer to slip ring grade table	voltage range	0~440VAC/VDC	0~440VAC/VDC
working temp.	-30℃~80℃	insulation resistance	≥1000MΩ/500VDC	≥1000MΩ/500VDC
work humidity	0~85% RH	lead wire spec.	AWG17# Silver -plated teflon	AWG22# Silver -plated teflon
contact material	refer to slip ring grade table	lead wire length	standard 300mm(can be customized)	
housing material	aluminum alloy	Dielectric Strength	500VAC@50Hz, 60s	
torque	0.1N.m;+0.03N.m/6 circuits	Electrical noise	<0.01Ω	
material	RoHS certificate			
CE certificate	Yes			

Grade code

Grade code	Max rotating speed	working life	contact material
C:standard	400RPM	20 millions	precious metal
D:industrial	800RPM	60 millions	gold-gold

Color Code of Lead Wire

ring #	1	2	3	4	5	6	7	8	9	10	11	12
color	BLK	BRN	RED	ORG	YEL	GRN	BLU	PUR	GRY	WHT	PINK	LGT BLU
ring#	13	14	15	16	17	18	19	20	21	22	23	24
color	WHT/BLK	WHT/BRN	WHT/RED	WHT/ORG	WHT/YEL	WHT/GRN	WHT/BLU	WHT/PUR	WHT/GRY	BLK/RED	BLK/BRN	Transparent

Remark: "1" : the first wire from rotor side , UH2586-01-06S wire color sequence:BLK/BRN/RED/ORG/YEL/GRN , 24 color wires as one group , if more than 24wires, repeat as sequence , use number tube to tell group 1#, 2#....